




## Solar photovoltaic systems comprised of panels and mounting hardware for low slope, commercial rooftops.

Proprietary cylindrical modules optimize the collection of sunlight and enable Solyndra panels to achieve the highest rooftop coverage without the need for costly mounting hardware or rooftop penetrations. By significantly reducing installation costs and increasing the electricity generated per rooftop, Solyndra delivers electricity at the lowest cost per kilowatt hour.

Solyndra Module

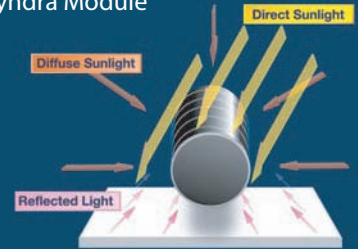

Significantly more solar electricity per rooftop per year  
Approximately 2x the roof coverage with no need for tilting and spacing

Fast, easy, economical installation  
Typically, 1/3 the labor, 1/3 the time, at 1/2 the cost

Lightweight and self-ballasting  
No penetrations or attachments required

# Product Specifications

## Electrical Data

Measured at Standard Test Conditions (STC) irradiance of 1000 W/m<sup>2</sup>, air mass 1.5, and cell temperature 25° C

Model Number		SL-001-150	SL-001-157	SL-001-165	SL-001-173	SL-001-182	SL-001-191 Release Date TBD
Power Rating (P <sub>mp</sub> )	Wp	150 Wp	157 Wp	165 Wp	173 Wp	182 Wp	191 Wp
Power Tolerance ( %)	%/Wp	+4, -5	+/-4	+/-4	+/-4	+/-4	+/-4
V <sub>mp</sub> (Voltage at Maximum Power)	Volts	65.7 V	67.5 V	69.6 V	71.7 V	73.9 V	76.1 V
I <sub>mp</sub> (Current at Maximum Power)	Amps	2.28 A	2.33 A	2.37 A	2.41 A	2.46 A	2.51 A
V <sub>oc</sub> (Open Circuit Voltage)	Volts	91.4 V	92.5 V	93.9 V	95.2 V	96.7 V	98.2 V
I <sub>sc</sub> (Short Circuit Current)	Amps	2.72 A	2.73 A	2.74 A	2.75 A	2.76 A	2.77 A
Temp. Coefficient of V <sub>oc</sub>	%/°C	-0.24					
Temp. Coefficient of I <sub>sc</sub>	%/°C	-0.02					
Temp. Coefficient of Power	%/°C	-0.26					

## System Information

Cell type	Cylindrical CIGS
Maximum System Voltage	Universal design: 1000V (IEC) & 600V (UL) systems
Dimensions	Panel: 1.82 m x 1.08 m x 0.05 m Height: 0.3 m to top of panel on mounts
Mounts	Non-penetrating, powder-coated Aluminum Up to 2.17 mounts per panel
Connectors	4 Tyco Solarlok; 0.20 m cable
Series Fuse Rating	23 Amps
Roof Load	16 kg/m <sup>2</sup> (3.3 lb/ft <sup>2</sup> ) panel and mounts
Panel Weight	31 kg (68 lb) without mounts
Snow Load Maximum	2800 Pa (58.5 lb/ft <sup>2</sup> )
Wind Performance	208 km/h (138 mph) maximum Self-ballasting with no attachments
Operating and Storage Temp	-40° C to +85° C
Normal Operating Cell Temperature (NOCT)	41.7° C at 800 W/m <sup>2</sup> , Temp = 20° C, Wind = 1 m/s
Certifications/Listings	UL1703, IEC 61646, CEC listing IEC 61730, IEC 61646, CE Mark Application Class A per IEC 61730-2 Fire Class C
Warranty	25 year limited power warranty 5 year limited product warranty



Solyndra's panels come with all of the mounts, grounding connectors, lateral clips, and fasteners required to build a standard array.

ÉNERGIE  
**MATRIX**  
ENERGY



296 Labrosse Avenue, Pointe-Claire, QC, Canada, H9R 5L8  
Tel: (514) 630-5630 Toll Free: 1-866-630-5630 Fax: (514) 426-9123  
info@matrixenergy.ca www.matrixenergy.ca

**SOLYNDRA**<sup>TM</sup>  
The new shape of solar<sup>TM</sup>

Specifications subject to change without notice.

Solyndra, Inc. • 47700 Kato Road • Fremont, CA • www.solyndra.com